


ELINA PATYKOVA

ПРО ШИТЬЕ

Instructions  
for sewing

## Pants Broad

#брюки\_broad

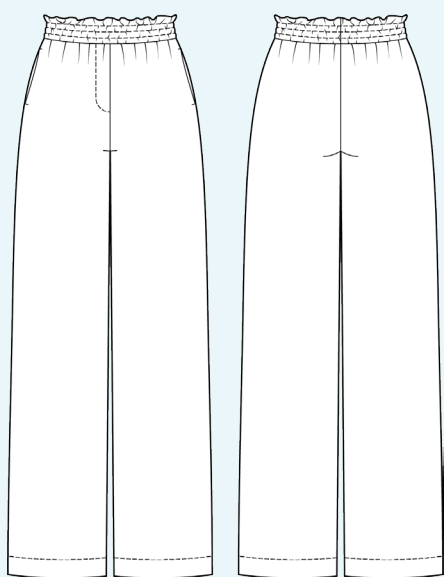

Skill level



## Materials and notions



- tinsel,
- kantenband (stabilizing tape),
- elastic 40 mm (1 9/16) wide,
- matching thread,
- Universal 80 needles.

If you are not sure about the fit of the garment, it is recommended to sew a muslin with similar properties (elasticity, thickness, drape) first. This will allow

you to adjust the length, width and fit of the garment and save time.



To find out how long a piece of fabric to take, you should place the pattern pieces onto the table, the floor or bedspread, pre-measured width equal to half the width of the selected fabric. Place the pieces, caring the direction of the grain line, their number, i.e., the way you will place them when cutting. Measure the length of the pattern pieces fit, add to this length 5% for the fabric shrinkage - this will be the required amount of fabric for the project.


Before beginning your sewing project, wash the fabric on warm, dry, and iron it.

How to cut: Print and glue all the paper patterns. When printing, do not forget to check the size of the test square.

Put the paper pattern pieces onto the fabric. It is important to check that the grain is straight. Pin the paper pattern pieces to the fabric gently and cut the fabric along them. Note: all the seam allowance are included. Transfer all the marks from the pattern onto the wrong side of your fabric.




## Now you have

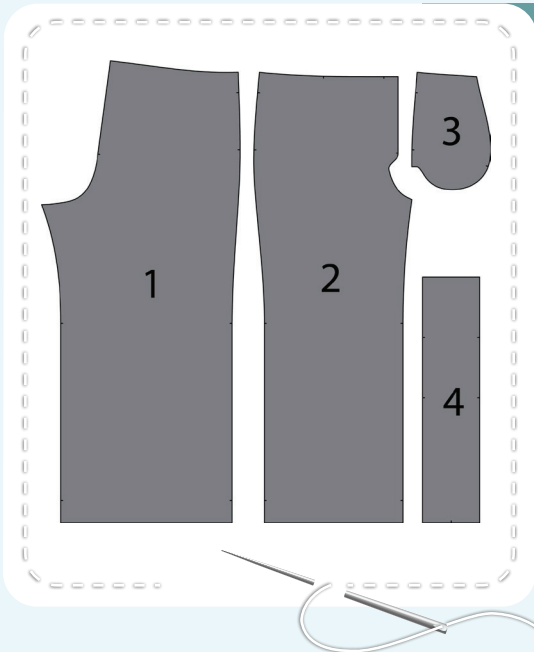

### PANTS PIECES:

1. back - cut 2
2. front - cut 2
3. pocket lining - cut 4
4. waistband - cut 1 on the fold

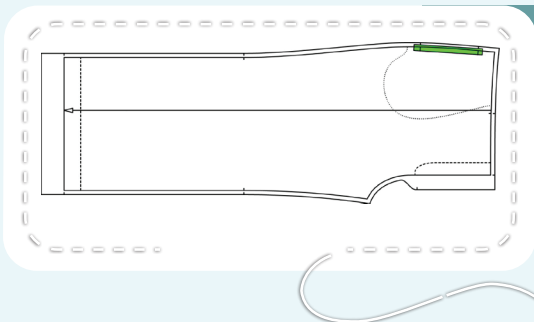

### PIECES TO INTERFACE:

- Green - kantband:
- pocket openings on the pants front

## Construction

# Symbols



straight stitch



the stitch length in (mm)



flat lock stitch



zigzag stitch



the stitch width in (mm)



3-Step Zigzag Seam Finishing



unilateral zipper presser foot



universal presser foot



invisible zipper presser foot



**pinning**

You should lockstitch the seam and trim the thread tails or tie the seam thread tails and hide them into the seam after sewing a serger stitch or cover seaming chain stitch.



double welting (piping) presser foot



3-thread serger stitch



4-thread serger stitch

## NOTE

**A**

### **4-thread serger stitch**

If you do not have a serger, you can use stretch stitches available on your sewing machine, or at least, a zigzag stitch.

**B**

### **3-thread serger stitch**

If you do not have a serger, you can replace it with an overedge stitch, or a zigzag stitch.

**C**

### **flat lock stitch**


If you do not have a coverstitch machine, the flat seam can be performed with a) a twin needle on a sewing machine, b) decorative stretch seam on a sewing machine, c) finish the seams with serger and stitch them with a straight stitch.



# Pants construction



1

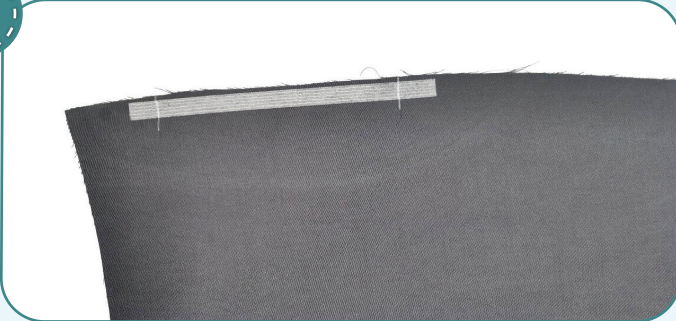


Fuse pieces of kantenband to the pocket openings on the pants front.

2




With right sides together, pin or baste the pocket lining to the front pieces side edges, aligning the marks and upper edges. Stitch it in place 9 mm (3/8") in from the edge. Stitch the rest three pocket lining pieces to the other front and both pants backs.

3

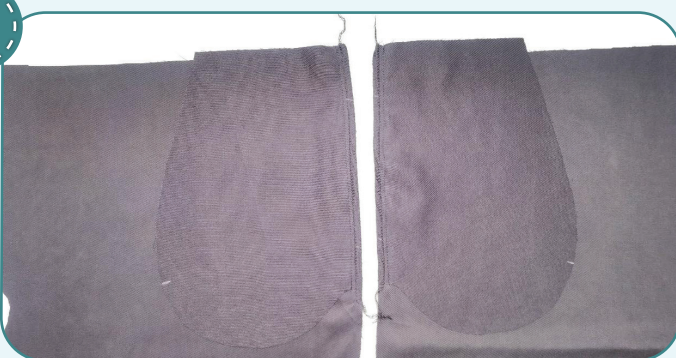

Finish the side and pocket seam allowances with a serger. Finish stitching 10 mm (3/8") below the pocket edge. Press the seam allowance towards the pocket lining. Repeat the process for the rest pocket lining pieces.

4

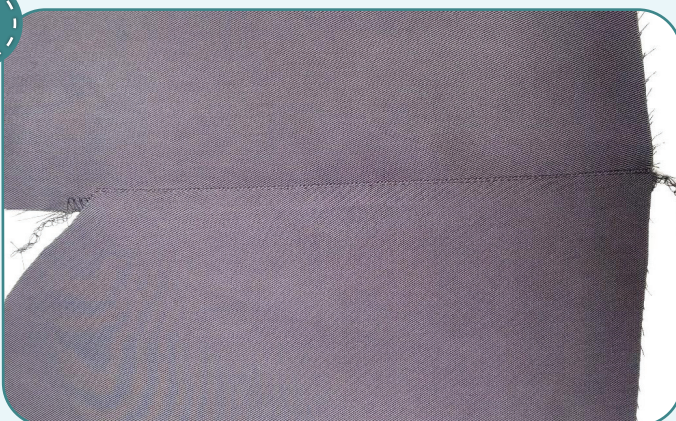

Topstitch along the pocket lining 1 mm (1/16") away from the seam. Press it. Repeat the process for the rest pocket lining pieces.





## PANTS CONSTRUCTION

5



With right sides together, pin the front and the back along the side seam up to the pockets. Baste exactly atop the pocket lining attaching seams, along the pocket openings, to have them at the same level.

6

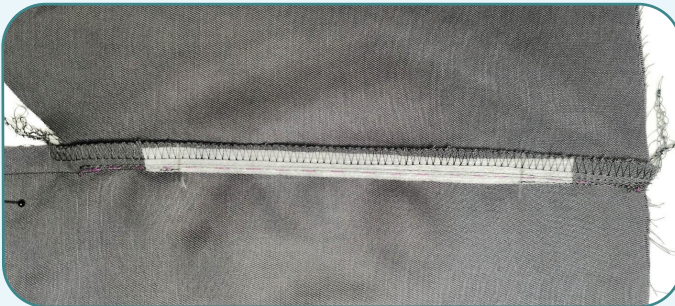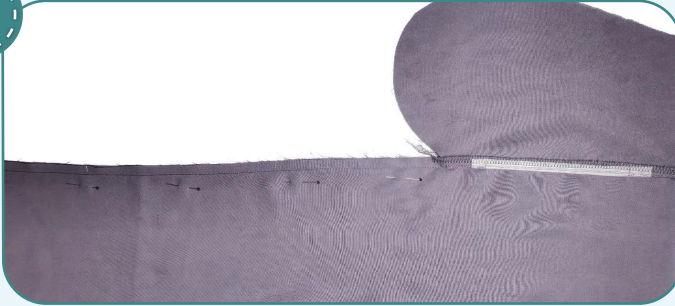

Stitch the side seam 10 mm (3/8") in from the edge. Finish stitching at the pocket opening lower mark. Repeat the process for the side seam between the pocket opening upper mark up to the garment upper edge. Care the stitching along the pocket linings were done 1-1,5 mm (1/16") away from their attaching seams. Check the linings are not seen on the right side after the stitching.

7




Pin the pocket linings together. Stitch them together 1 cm (3/8") in from the edge. Finish stitching before the side seam.

8



Finish the side seam allowances and the pocket linings with one seam using a serger. Press the seam allowances and the pocket towards the front.


9

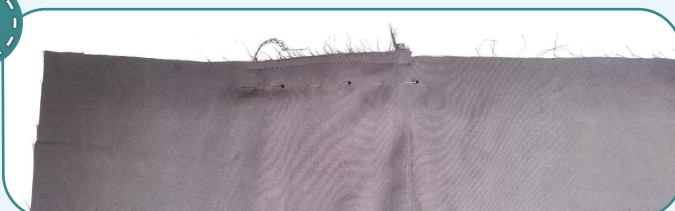

Secure the pocket lining along the upper edge 7 mm (1/4") away from the edge.



10

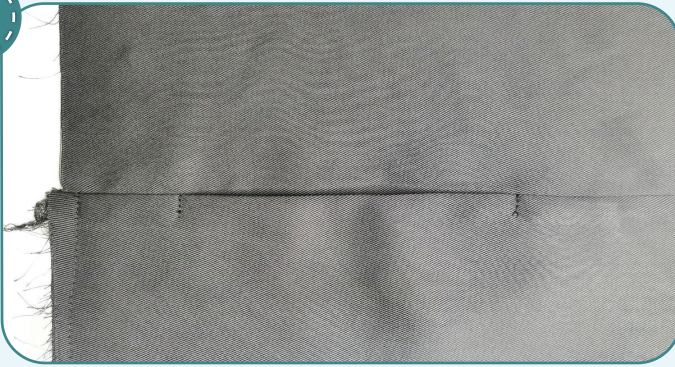

2,5-3

Bar tack both pocket opening ends. Start stitching exactly at the pocket opening marks. The bar tack length is 7-10 mm (1/4-3/8"). Repeat the process for the opposite pocket (steps 5-10).

11



2,5-3

Pin the fronts along the center edge and the fly front with right sides together. Stitch the pieces along the line.

12



2,5-3

Extend the center front seam on the fly front by about 15-20 mm (9/16-13/16") to the mark transferred from the pattern. Secure the fly front along the upper edge with a straight stitch 10 mm (3/8") in from the edge.

13




3-4



7

Use a serger to finish the seam allowances together. Press the seam allowances and the fly front towards the right side.

14

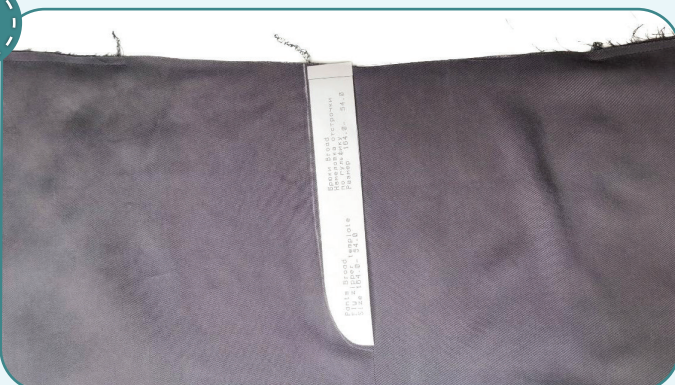

Pin or baste the fly front. Use a template to transfer the marking onto the right front.



15



2,5-3

Topstitch the fly front along the marking from the right side of the fabric. Press it.

16



2,5-3

Pin the garment back pieces along the crotch edge with right sides together. Stitch the pieces 10 mm (3/8") in from the edge.



3-4



7

Finish the seam allowances together with a serger. Press the seam allowances to the right.


17



2,5-3

Pin the garment front and back pieces along the inseams. Stitch them 10 mm (3/8") in from the edge.

18

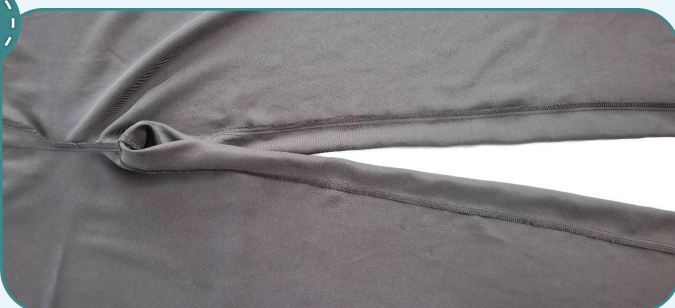


3-4



7

Finish the inseams with a serger. Press the inseam allowances towards the front.

19

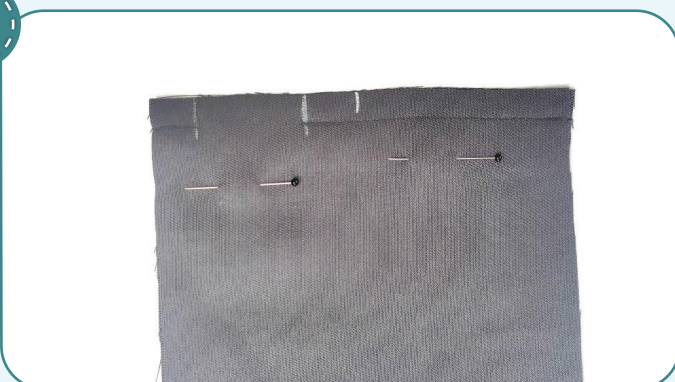

2,5-3

Place the waistband in half, right side inside, and pin it along the short edges. Stitch the waistband in a ring with two straight stitches 85 and 15 mm (3 3/8 and 9/16"), leaving an opening in it. Press the seam open.

20



2,5-3

Fold the waistband in half, lengthwise, wrong side inside and press it. Stitch a straight seam 15 mm (9/16") away from the fold. Press the seam again.

21



2,5-3

Pin the waistband to the garment upper edge, with right sides together, aligning the waistband seam with the garment crotch seam, waistband center with the front crotch seam and the marks with the side seams. Stitch the peaces 10 mm (3/8") in from the edge.



3-4



7

Finish the seam allowances together with a serger. Seam allowances are pressed down.

22



Cut the elastic 40 mm (1 9/16") wide, with the length indicated on the waistband pattern. Thread it through the opening in the waistband with a safety pin or a bodkin.

23



2,5-3

Join the ends of the elastic together with straight or zigzag stitch. Spread the elastic evenly around the waistband.

**NOTE:** it is recommended to try it on, check the fit, length and ease. When trying the garment, consider the lower hem seam allowance width. Make sure, that the pants waistband is comfortable to wear. If need be, change the length of the elastic.



24



Hand-baste the opening in the waistband with a blind stitch.


25




Evenly stretching the elastic, stitch it 30 mm (1 3/16") from the waistband fold.



26

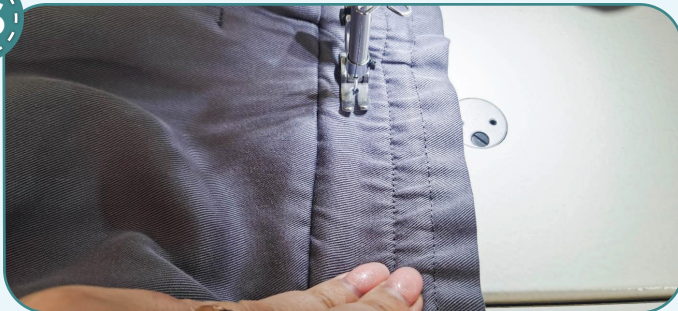

Stitch the second parallel seam 15 mm (9/16") away from the waistband attaching seam.

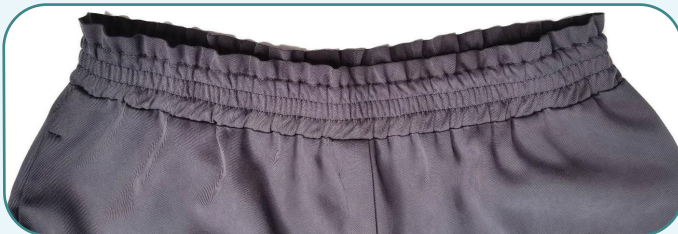

27



Press the pant leg lower hems to the wrong side first by 15 mm (9/16") and then by 40 mm (1 9/16"). Pin or hand-baste the fold.

28



2,5-3

Topstitch the pant leg lower hems 20 mm (13/16") in from the edge. Press them.

29



Remove the basting stitches, trim, and hide the thread tails and press the garment once again. The pants are ready!



ELINA PATYKOVA

ПРО ШИТЬЕ

## Pants Broad

Thank you for joining my  
team and me!  
Share your works in my  
groups. Hope you will stay  
with us for our next project!



ELINA\_PATYKOVA



ELINA-PATYKOVA.RU



VK.COM/ELINA\_PATYKOVA